

# MULE C-432

*Heavy duty narrow towing solutions*



Photos are shown with optional features.



Our three-wheel design allows the C-432 to provide the shortest turning radius available in a sit-down combination burden carrier / tow tractor. With its 71 cm wheelbase, this vehicle can maneuver into corners other powered vehicles simply cannot reach.

Equipped with heavy-duty batteries and a built-in fully-automatic charger, this vehicle is always ready to go. It's ideal for moving loads over smooth floors in warehouses, hospitals, schools, and hotels where quiet, fume-free operation is necessary.

Customisations include strobe light, reverse alarm, portable charger, head lights, taillights, fibreglass cab, vinyl doors, side / rear view mirrors, hitch, and soft solid tyres.

## Features

- Built-in fully automatic charger
- Easily clears narrow aisles and doorways
- Fully-welded all steel construction
- Adjustable seat
- 75 x 117 cm deck (-cab)
- Customisable to fit your application



# MULE C-432 TOW TRACTOR


## Performance

LOAD CAPACITY	635 kg
TOW CAPACITY	3969 kg*
DRAWBAR PULL	780 kN
MAX SPEED (UNLOADED)	14 km / h
TURNING RADIUS	178 cm

\*Based on Standard Configuration Actual towing capacity is dependent on application, vehicle configuration, ballast weight, operating environment, and vehicle maintenance.

## Dimensions

OVERALL LENGTH	201 cm
OVERALL WIDTH	76 cm
HEIGHT (with cab)	102 cm (164 cm)
DECK HEIGHT	58 cm
WHEEL BASE	71 cm
DECK SIZE (with cab)	75 x 117 cm (75 x 102 cm)

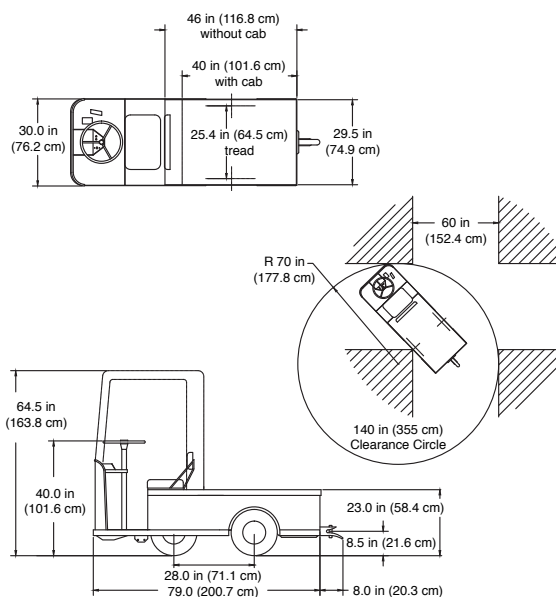

## Power supply / Drive train

MOTOR	36V, 4.5 kW, DC, 6 Hp
SYSTEM VOLTAGE	36V DC
DRIVE AXLE	Power Traction Automotive Differential
BATTERIES	210 Amp-hour Lead Acid, 6 Volt, 6 Each
CHARGER	Built-in Automatic, 1 kW, 36 Volt, 110 VAC w/ Interlock
CONTROLLER	400 Amp, 36 Volt, Solid State

## Chassis

FRAME	Fully Welded, Unitised, 16 Gauge, Diamond Plate Steel Body
STEERING	Manual, Chain and Sprocket Reduction to Front Fork
SUSPENSION	Solid, Front and Rear
BRAKES	Mechanical Rear Drum Brakes, Hand-Operated Parking Brake
TYRES	4.80 x 8, Load Range B, Pneumatic

## General

MAXIMUM OCCUPANCY	1 (113 kg)
UNIT WEIGHT	416 kg
SEATS	Single, Adjustable, Black Vinyl, w/ Safety Seat Switch
INSTRUMENTATION	Battery Status Indicator, Forward / Reverse Selector, Key Switch, Electric Horn
CONFORMANCE	Type E OSHA 1910.178, ANSI B56.8 and B56.9

## Options

- Head light / Taillight
- Portable charger
- Reverse lights
- Hour meter
- Non-marking tyres
- Windshield wiper
- Reverse alarm
- Beacon or strobe light
- Fibreglass cab
- Directional signals
- Stake sides
- Diamond plate deck
- Soft solid tyres
- Side / rear view mirrors
- Vinyl doors
- Various hitches
- Custom paint colour
- Undercoating / galvanising

 **Toyota Material Handling Australia** 8 Secombe Place, Moorebank NSW 2170

 **1800 425 438**

 [www.toyotamaterialhandling.com.au](http://www.toyotamaterialhandling.com.au)

